

Submittal Data Sheet

absolute comfort

Project Name:	
Location:	Ар
Engineer:	Da
Submitted to:	Co
Submitted by:	Un
Reference:	Dra

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Performance

Indoor Unit Model No:	FTXS15HVJU
Cooling Capacity (Btu/hr):	15000
Sensible Capacity (Btu/hr):	9600
Cooling Input Power (kW):	0.04
Heating Capacity (Btu/hr):	18000
Heating Input Power (kW):	0.04
Nominal Ext Static Pressure (inH2O):	0
Max Ext Static Pressure (inH2O):	0

Indoor Unit Type:	Wall Mounted
Cooling Naminal Conditions	Indoor: 80°F DB/67°F WB
Cooling Nominal Conditions	Outdoor: 95°F DB/75°F WB
Heating Nominal Conditions	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
Nominal Piping Length	25
Nominal Height Separation	0

Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	data book
Max. Fusible Amps MFA (A):	data book
Dimensions (HxWxD):	11-7/16x41-5/16x9-3/8
Panel (HxWxD):	N/A
Net Weight (lbs):	26.5
Weight with Panel (lbs):	

Airflow Rate (CFM wet coil)	519/436/353
Moisture Removal (pt/h):	3.4
Gas Pipe Connection (inch):	1/2
Liquid Pipe Connection (inch):	1/4
Condensate Connection (inch):	11/16
Sound Pressure Level (dBA):	45
Sound Power Level (dBA):	

Appearance - Indoor Unit






Submittal Data Sheet

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Dimensional Drawing - Indoor Unit

Daikin AC TRL Generated Submittal Data

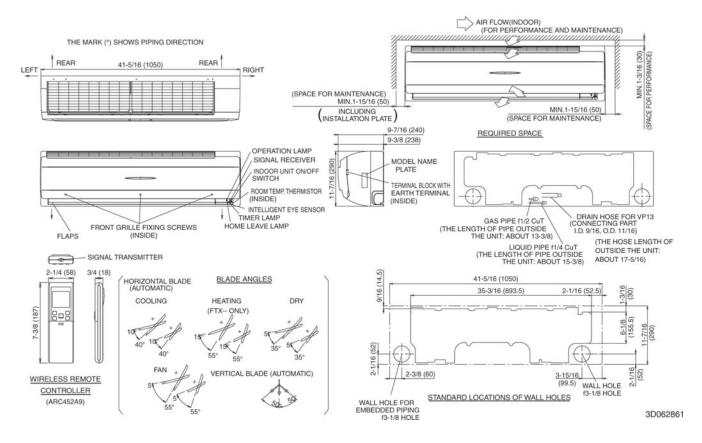



Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

<u>Notes</u>

Daikin AC TRL Generated Submittal Data

Includes Intelligent Eye occupancy sensor: Options include Wired Remote Controller, Std U.S. Warranty: 5yrs Parts, 1yr Limited Labor

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006