

## ENERGY EFFICIENT POOL HEATING SOLUTION

Madimack's InverECO pool heating and cooling series is built with efficiency and simplicity in mind. Powered by Madimack's InverMAC technology to enhance performance and fitted with premium aluminum alloy casing for endurance, the InverECO is a value-packed backyard pool heating solution. Boasting the smallest footprint for easy installation and Wi-Fi included as a standard feature, it delivers on performance and convenience; busy pool owners can change their pool's temperature and timers from wherever their day takes them. The InverECO is the go-to heating solution to extend the backyard pool season.

Trusted by  
POOL PROFESSIONALS



### Soft Start

InverECO will start from 0 amps and increase steadily to protect your electrical system



### Heat & cool

With integrated heating and cooling into a single unit, enjoy your swimming pool any season of the year



### Boost & silence

Switch between Boost Mode to heat your pool faster and Silence Mode when quieter operation is preferred



### Dedicated pool heating inverter control system



### Wi-Fi module and smart app



### Electronic expansion valve technology



### Twisted titanium heat exchanger



### Twin-rotary Inverter compressor





### Down to 32°F operation temperature



**AUTOMATION  
READY**

**AHRI CERTIFIED™**



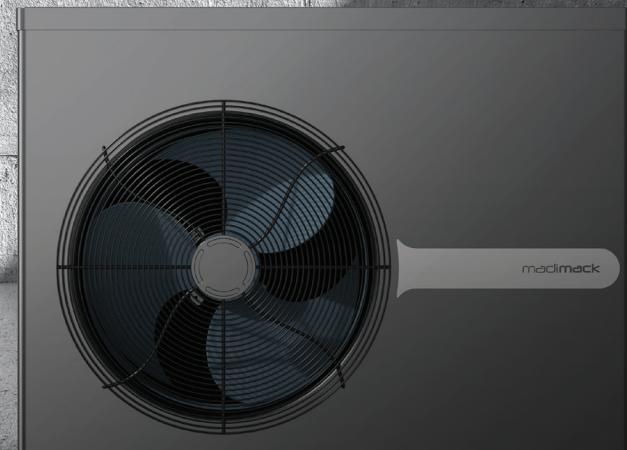

## TECHNICAL PARAMETERS

Model	InverEco 32,000	InverEco 40,000	InverEco 50,000	InverEco 66,000
SKU	INVECO320	INVECO400	INVECO500	INVECO660
<b>PERFORMANCE CONDITION:</b> Air 80°F (26.7°C) / Water 80°F (26.7°C) / Humidity 80%				
Heating capacity (BTU)	32,000	40,000	50,000	66,000
COP Range	10.0 ~ 6.7	10.7 ~ 6.0	10.2 ~ 6.2	11.6 ~ 6.2
<b>PERFORMANCE CONDITION:</b> Air 80°F (26.7°C) / Water 80°F (26.7°C) / Humidity 63%				
Heating capacity (BTU)	31,000	37,500	48,000	61,000
COP Range	8.7 ~ 6.3	9.9 ~ 5.6	9.2 ~ 6.0	11.1 ~ 5.8
<b>PERFORMANCE CONDITION:</b> Air 50°F (10°C) / Water 80°F (26.7°C) / Humidity 63%				
Heating capacity (BTU)	17,500	21,400	24,000	28,000
COP Range	4.5 ~ 4.1	5.0 ~ 4.0	5.5 ~ 4.6	6.2 ~ 5.0
<b>TECHNICAL SPECIFICATIONS</b>				
Operating air temperature (°F)		32 ~ 109		
Operating air temperature (°C)		0 ~ 42		
Heat exchanger		Titanium in PVC		
Power supply		208V ~ 230V/1 Ph/60Hz		
Water connection (mm)/(inch)		48.3/1.5		
Rated input power at air 80°F (26.7°C) (kW)	0.27~1.42	0.37~1.87	0.43~2.41	0.54~3.37
Rated input current at air 80°F (26.7°C) (A)	1.17~6.17	1.81~8.13	1.87~10.43	2.35~4.65
Sound level at 10ft (3.05m) dB(A) LP	33.2 ~ 45.0	33.8 ~ 45.2	34.7 ~ 45.8	38.4 ~ 47.1
Advised water flux (L/min)	50 ~ 67	67 ~ 100	83 ~ 116	108 ~ 142
Advised water flow (GPM)	13.2 ~ 17.7	17.7 ~ 26.4	21.9 ~ 30.6	28.5 ~ 37.5
Net dimension LxWxH (mm)	954 × 318 × 647	954 × 318 × 647	954 × 318 × 647	954 × 388 × 648
Net dimension LxWxH (inch)	37.6" × 12.5" × 25.5"	37.6" × 12.5" × 25.5"	37.6" × 12.5" × 25.5"	37.6" × 15.3" × 25.5"
Net weight (kg)	47	46	52	61
Net weight (lb)	103.6	101.4	114.6	134.5
Maximum air volume(m³/h)	3600	3600	4100	4500
Water pressure drop(Kpa)	3	3	3.5	4

\* The data above is only for reference. For specific data, please refer to the nameplate on the unit.

**madimack**